


TECHNICAL SPECIFICATIONS SHEET

E-MEETING

FEATURES

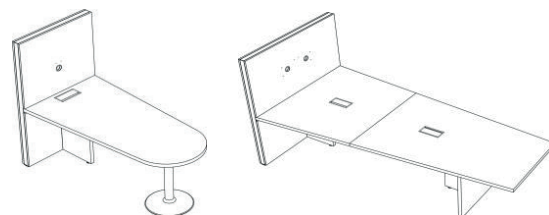

WORKTOPS

| | |
|----------|--|
| MELAMINE | <p>Melamine covered particle board panels, THK 38 mm. 2 sides treated with an anti-reflective coating Panel densities 650 kg/m³ Flat edge banding, THK 2 mm made from a strip of glued ABS, rounded on the upper and lower edges. Edging in a matching finish to the worktop</p> <p>Panels are sourced from sustainably managed forests (PEFC) Rated M3 fire-resistant (combustible, moderately flammable) in compliance with standard NF EN 13501-1. Panels are certified E1 (control of formaldehyde emissions), emitting 6.5 mg HCNO/100 mg and comply with standard NF EN 717-2.</p> <p>Trapeziform worktops fitted with 2 structural reinforcement beams W. 3,000 mm</p> <p>Worktops feature 1 or 2 pre-drilled openings for top access housings, depending on size Top access housing modules to be ordered separately (see options below)</p> |
|----------|--|

LEGS AND STRUCTURE

| | |
|--------------------|---|
| MELAMINE PANEL LEG | <p>> With trapeziform worktop Melamine panel legs 38 mm thick, THK 2 mm ABS edge banding matching the worktop finish.</p> <p>> With all worktop types Panel leg THK 38 mm positioned under the worktop towards the melamine wall to provide added support. THK 2 mm ABS edge banding matching the worktop finish.</p> |
| METAL TUBULAR LEG | <p>> With curved worktop Tubular leg ø 80 mm Metal top plate THK 4 mm Attaches to worktop using metal inserts and screws Metal base plate ø 450 mm for legs H. 1,050 mm</p> |

WALL

| | |
|--|---|
| | <p>> Metal frame 60 x 30 mm and THK 2 mm - W. 900 or 1,400 mm</p> <p>> Covering comprising 4 melamine panels THK 19 mm Flat edge banding, THK 2 mm made from a strip of glued ABS, rounded on the upper and lower edges. Edge banding matching the worktop finish</p> <p>> 1 or 2 pre-drilled openings ø 60 mm with grey snap-in ring on the top panel for cable routing Cable routing channels concealed behind the wall panels</p> |
|--|---|


OPTIONS

| | |
|------------------------------------|--|
| WORKTOP POWER AND CABLE MANAGEMENT | <p>Housing modules with and without socket feeds:</p> <p>> Top access housing with soft-closing mechanism and grey integrated brushes</p> <p>> Assembly: To be fitted to worktops featuring pre-cut openings for housing modules. Dimensions: W. 240 x 120 mm</p> <p>> Available with built-in fixed socket feed (2PC + 2RJ45 + 1 USB charger). Supplied with a 2 m long EUR power supply cable. Available in CH and UK versions.</p> <p>> Choice of finish: Natural aluminium OI or White epoxy SO</p> |
|------------------------------------|--|



| | |
|------------------------------------|---|
| <p>FLATSCREEN MONITOR ARMS</p> | <p>> 24 inch monitor arm for curved worktop Vesa 75 and 100 Max. load: 8 kg Finish: Aluminium</p> <p>> Support arm for trapeziform worktops and flat-screen monitors 26 inches and over Vesa 100 and 200 Max. load: 70 kg Finish: Black</p> |
|------------------------------------|---|

DIMENSIONS

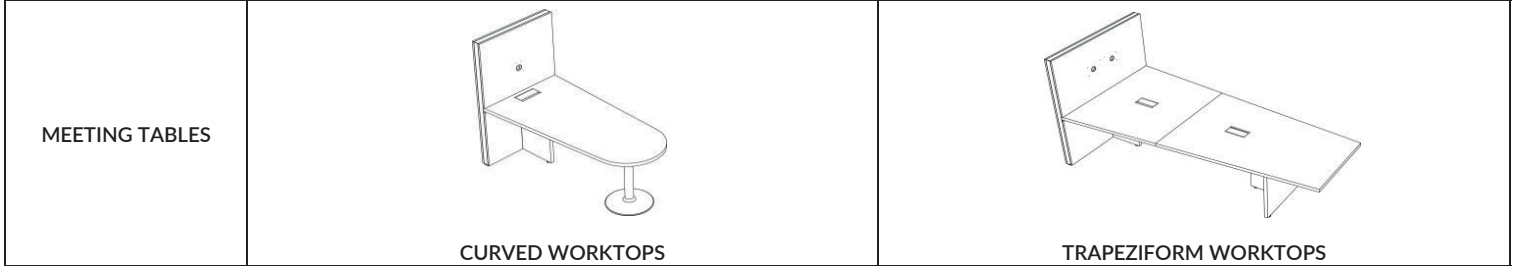

| OVERALL DIMENSIONS (in mm) | | |
|--------------------------------------|------------|------------|
| WORKTOPS | | |
| Depth | 900 | 1400 |
| Width | 1800 | 3000 |
| Desk height | 735 / 1050 | 735 / 1050 |
| Overall height | 1130 | |
| Number of top access housing modules | 1 | 2 |

| WALL | | |
|--------|-------------|-------------|
| Width | 900 | 1400 |
| Height | 1512 / 1827 | 1512 / 1827 |

