



Screens


Standard



Design

Screen composition

- 1 **Fabric screen** composed of 2 layers of XTREME Plus fabric, rated M1 fire-resistant, applied to a 6mm thick MDF panel.
- 2 **Melamine screen** composition: melamine covered, 8 mm thick MDF panel (certified E1 and M3 or M4).
- 3 **Polycarbonate screen** composition: transparent poly-carbonate honeycomb structure panel (8 mm thick).
- 4 **Mixed melamine / polycarbonate screen** composition: design similar to standard melamine screen but features an additional transparent polycarbonate honeycomb panel section, spanning 48 cm of its surface area.
- 5 **Mixed fabric / polycarbonate screen** composition: design similar to standard fabric screen but features an additional transparent polycarbonate honeycomb panel section, spanning 48 cm of its surface area.

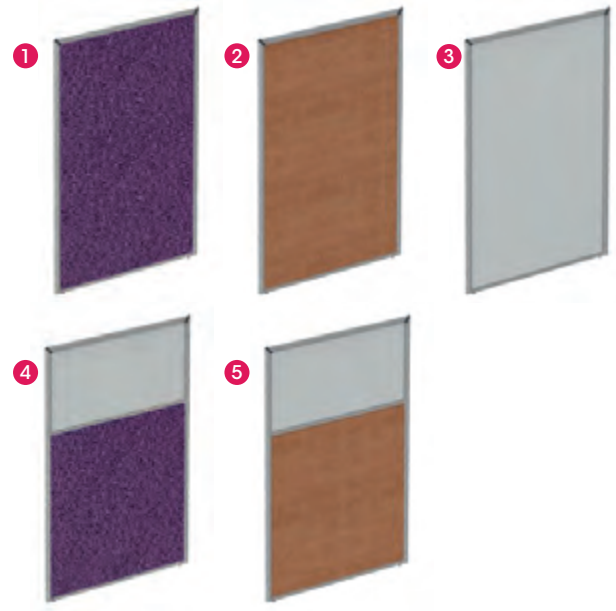


Frame

- 6 The screens are inserted into an aluminium frame with a lacquered white or aluminium grey finish.
- 7 Uprights (section 22 x 40 mm) and top cross-bars (similar profile) are cut at 45° to form a 90° join, supplemented by two ø 3.5 mm screws holding the structure together at the extremities. Uprights and lower section cross-bar (section 14 x 25) assembled by means of a 4mm thick steel plate coated in epoxy paint and four ø 3.5 mm screws holding the structure together at the extremities.
- 8 The screen is mounted on 2 stabilizer feet with the optional possibility to add an additional stabilizer in order to prevent the screens from tipping over.





Assembly

- 9 Made from white or aluminium grey **lacquered steel**, with dimensions 449 x 98 x 6 mm featuring two ø 8 mm perforations at each extremity of the stabilizer feet for attachment of castors and one central ø15 mm perforation for the panel fixation bolt. Stabilizer feet are to be ordered in function of the planned screen configuration. Linear layout: 2 feet required for every starter unit, then 1 foot shared between every 2 add-on screens. In case of 2 screens at an angle, T-shaped layout (3 screens) or cross-shaped layout (4 screens), no stabilizer feet are needed.
- 10 **Set of 4 lockable castors**, in a white or aluminium grey finish, diameter 65 mm. Ideal for facilitating the creation of permanent or temporary spaces and moving the screens around into variable configurations. Warning: Castor-mounted feet for screens must be purchased in sets of 2 per screen. A set of 2 mobile feet is composed of 2 fixed stabiliser elements and 4 castors.
- 11 Screens can be joined to one another thanks to **plastic connector** elements that are supplied with each screen package. The connector elements allow configurations of screens in line, or in variable angle layouts. sans achat de pièce supplémentaire.

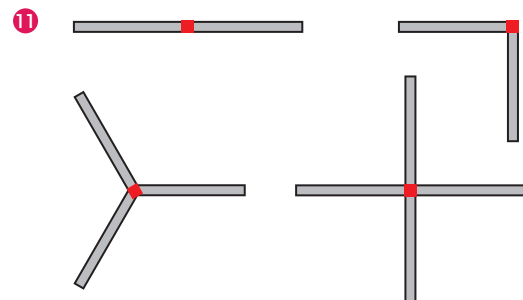

Overview in cm

from stock




Other dimensions, contact us for details.

Shadecard

Cat. B fabrics


from stock

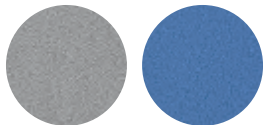

Light grey

Light blue

on request

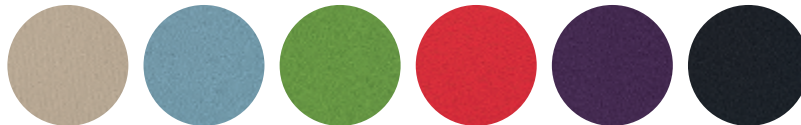

Beige

Glacier blue

Green

Vermillion red

Plum

Black

Melamine finishes (rectangular screens only)

from stock



Snow white

White maple

Light oak

French apple

Structure finishes

from stock



White

Aluminium grey

Standards



The PEFC brand guarantees that the purchased product comes from responsible sources and that through your purchase you participate in sustainable forest management.